


2 Steps Double-Acting Telescopic Cylinder With Hinged base

TECHNICAL SPECIFICATIONS

Manufacturer: EU
Working pressure: 180 bar
Maximum pressure: 230 bar
Max. speed: 0.5 m/s
Base: Stainless steel
Rod: C45 (Ck45)
Weight: 7.5 kg per unit

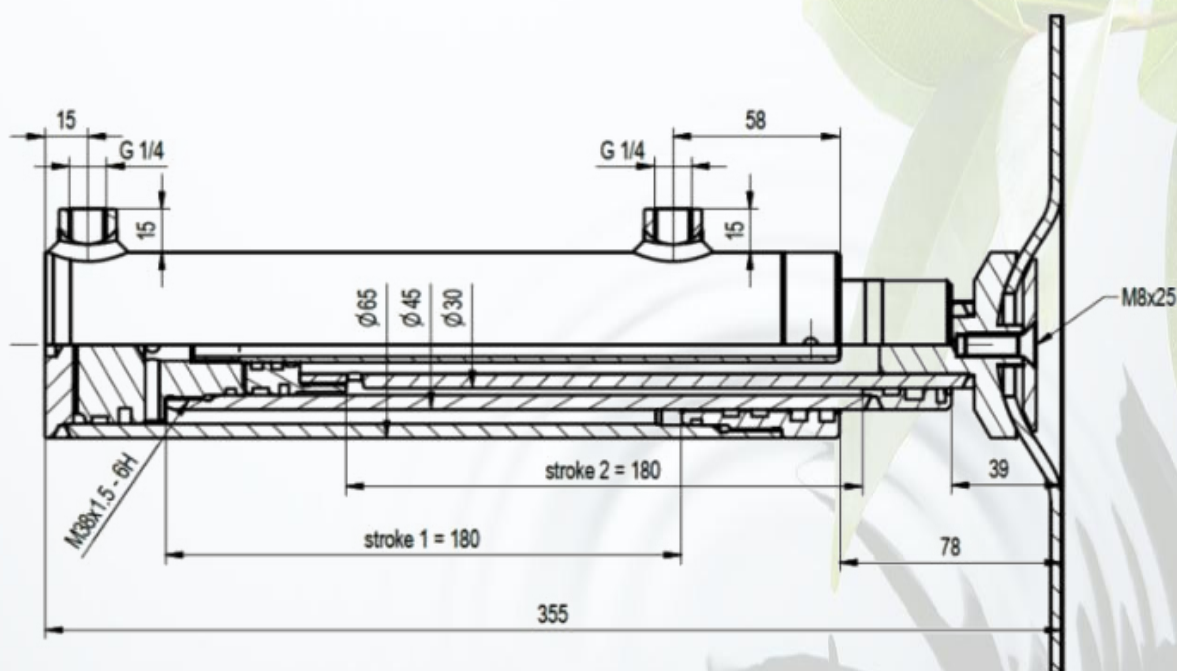

DESCRIPTION

High-quality double-acting telescopic cylinder with hinged stainless steel (RVS) base plate, specially developed for installation under motorhomes, caravans, trailers, or other vehicles that need to be positioned stably or level.

This cylinder extends in 2 stages of 180 mm each, providing a total stroke of 360 mm, and easily pushes 2000 kg. The telescopic cylinder has a limited installation height of only 355 mm including the base, making it ideal for mounting under motorhomes.

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.
TAON Hydraulic Components ApS • +45 24 48 84 80 • info@taon.dk • www.taon.dk
© TAON Hydraulic will always help you find the best solution.