



SPECIFICATION DATA


Parameters	Type	
	KPWR	KPWS
Flow Rate , l/min [GPM]	60	[15.85]
Rated Pressure , bar [PSI]	250	[3625]
Weight , kg	0,850	0,670
[lb]	[1.874]	[1.477]



**VALVE FOR MP, MR, MH HYDRAULIC MOTORS
KPWR**

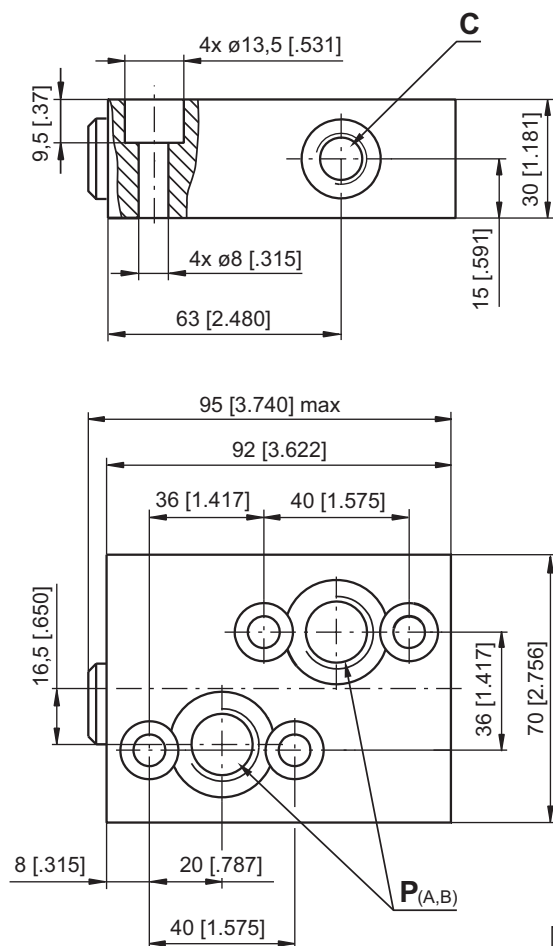

**VALVE FOR MS HYDRAULIC MOTORS
KPWS**

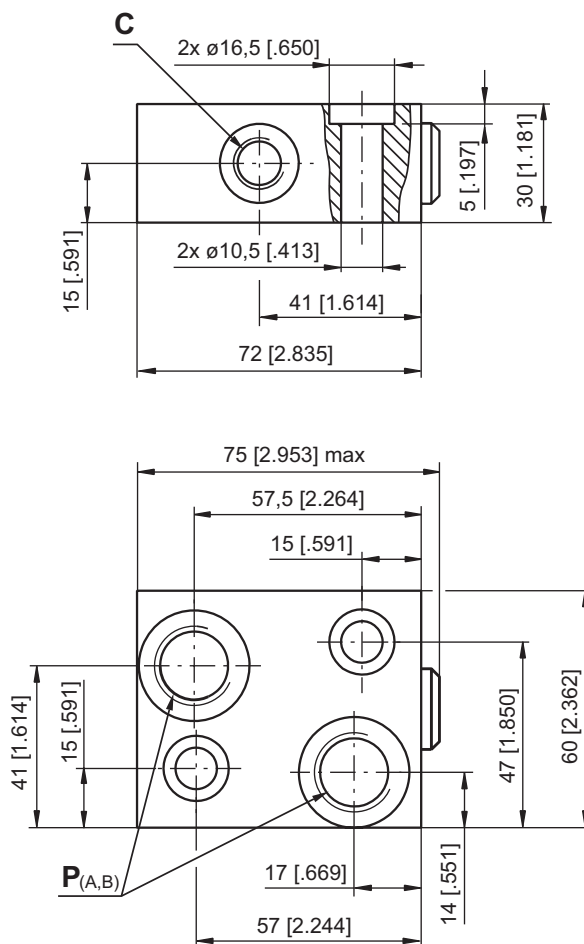

	Thread Ports - P _(A,B)	Thread Port - C
-	G1/2 17 [67] depth	G1/4 14 [55] depth
M	M22x1,5 17 [67] depth	M14x1,5 14 [55] depth
A	7/8 - 14 UNF O-ring 17 [67] depth	7/16 - 20 UNF O-ring 12,7 [50] depth

Note: KPWR Blocks are installed directly on MP, MR and MH Motors with four screws M8x30 - 8.8 DIN 912 or 5/16-18UNC, 1.25 [0.049] long ANSI B 18.3 .

Tightening torque 2,0^{+0,5} daNm [177⁺⁴⁴ lb-in].

KPWS Blocks are installed directly on MS Motors with two screws M10x35 - 8.8 DIN 912 or 3/8-16UNC, 1.5 [0.059] long ANSI B 18.3. Tightening torque 3,5 daNm [336 lb-in].