


Piston pump—Bent Axis

Shaft ISO 14 8x32x36

HDS 18 cc

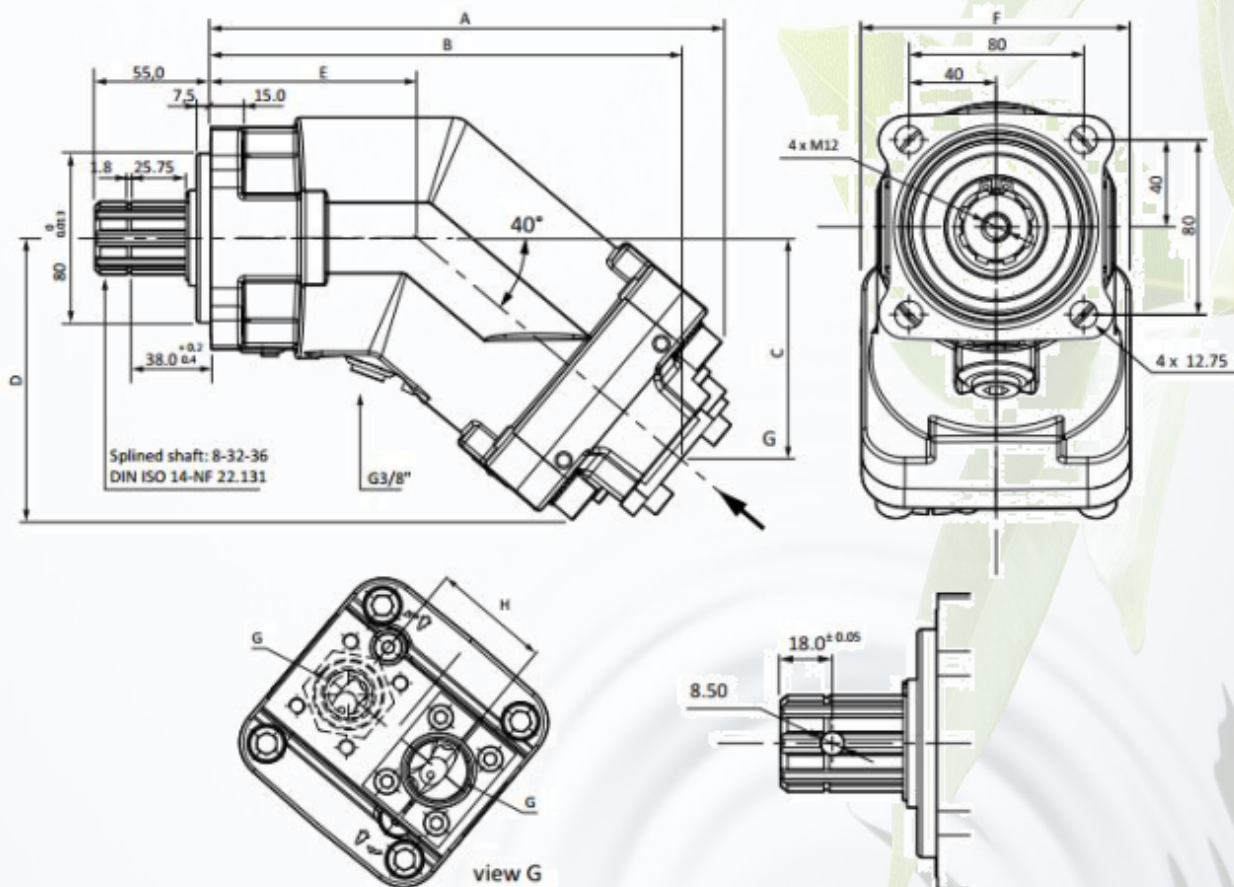

Pump type	Displacement (cc)	Max. Continuous Pressure (bar)	Min Intermittet P. Pressure (bar)	Max. Rotation Speed (rpm)	Max. Torque (Nm)	Max. Intermittent pressure (bar)	Weight without inlet fitting (kg)	Weight with inlet fitting (kg)	Torque without inlet fitting (kg)	Torque with inlet fitting (kg)
18	17.80	350	400	2500	105	-	9	9.4	8.75	9.19

Pump type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Fluid	Rotation
18	195	176	76	104	80	108	3/4"	54	Miral based hydraulic oils	CW-CCW

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.


• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.

Piston pump—Bent Axis

Fixed-displacement piston pump—Bent-Axis piston pump

HDS 25 cc

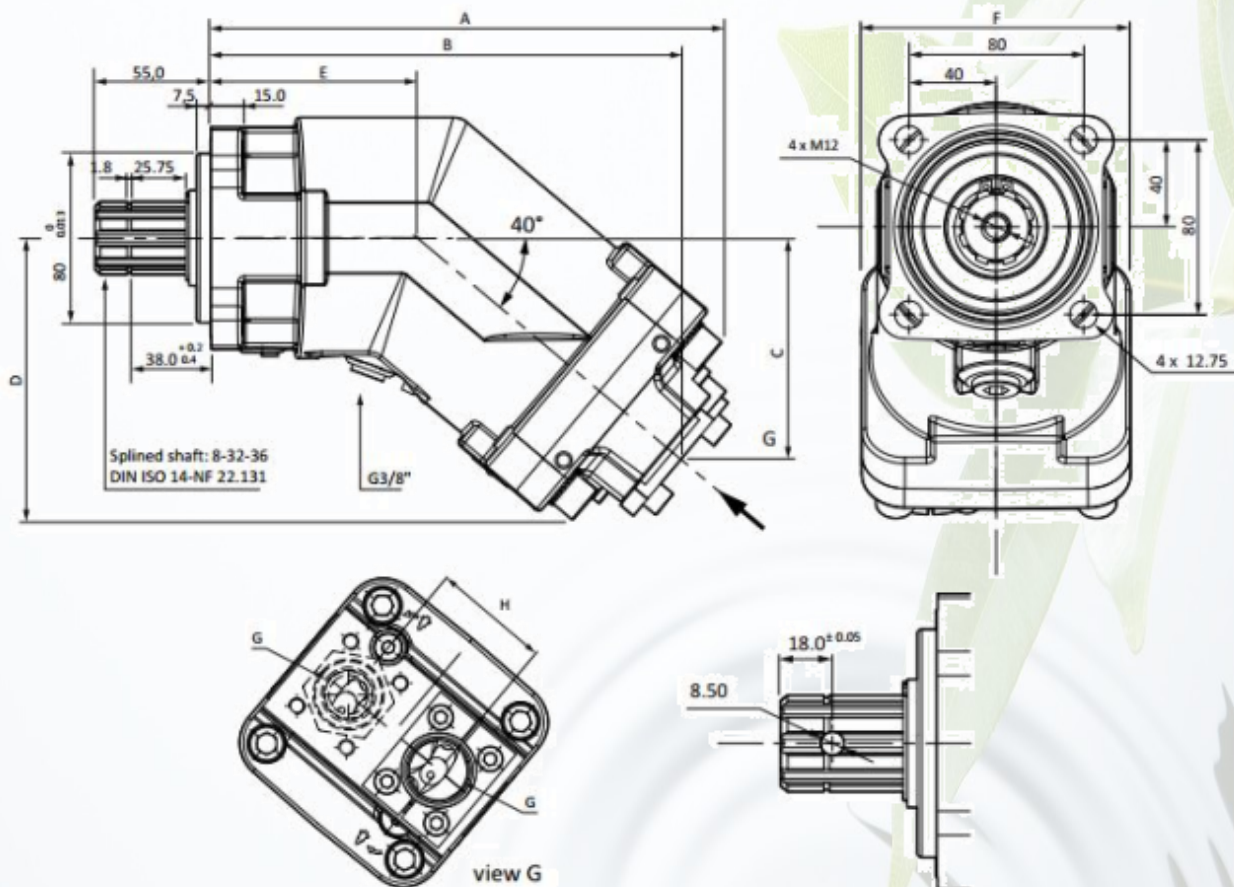

Pump type	Displacement (cc)	Max. Continuous Pressure (bar)	Min Intermittet P. Pressure (bar)	Max. Rotation Speed (rpm)	Max. Torque (Nm)	Max. Intermittent pressure (bar)	Weight without inlet fitting (kg)	Weight with inlet fitting (kg)	Torque without inlet fitting (kg)	Torque with inlet fitting (kg)
25	24.5	350	400	2500	146	-	9.5	9.9	8.82	9.23

Pump type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Fluid	Rotation
25	195	176	76	104	80	108	3/4"	54	Miral based hydraulic oils	CW-CCW

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.


• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.

Piston pump—Bent Axis

Fixed-displacement piston pump—Bent-Axis piston pump

HDS 35 cc

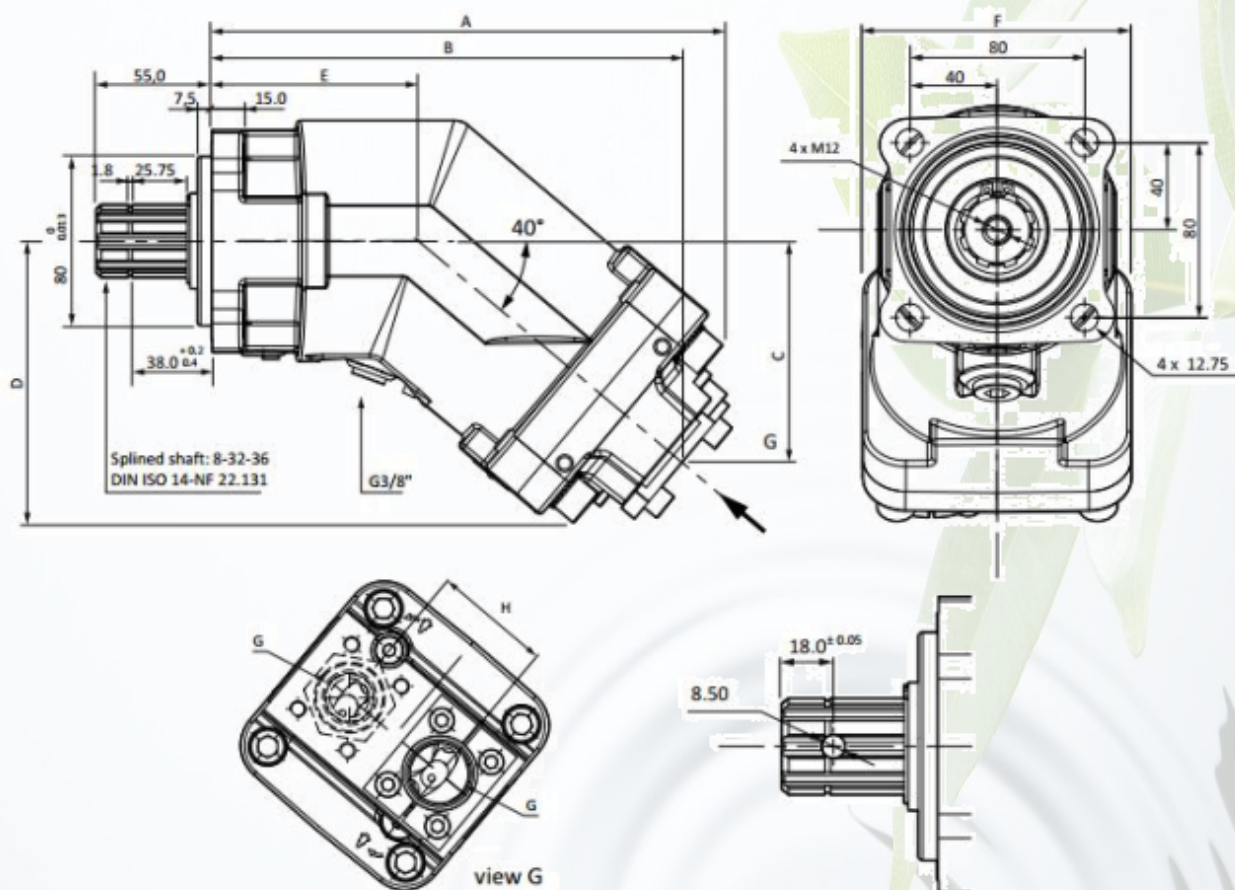

Pump type	Displacement (cc)	Max. Continuous Pressure (bar)	Min Intermittet P. Pressure (bar)	Max. Rotation Speed (rpm)	Max. Torque (Nm)	Max. Intermittent pressure (bar)	Weight without inlet fitting (kg)	Weight with inlet fitting (kg)	Torque without inlet fitting (kg)	Torque with inlet fitting (kg)
35	34.7	350	400	2500	190	-	10.5	10.9	11	11.52

Pump type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Fluid	Rotation
35	202	182	82	108	85	108	3/4"	54	Miral based hydraulic oils	CW-CCW

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.


• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.

Piston pump—Bent Axis

Fixed-displacement piston pump—Bent-Axis piston pump

HDS 45 cc

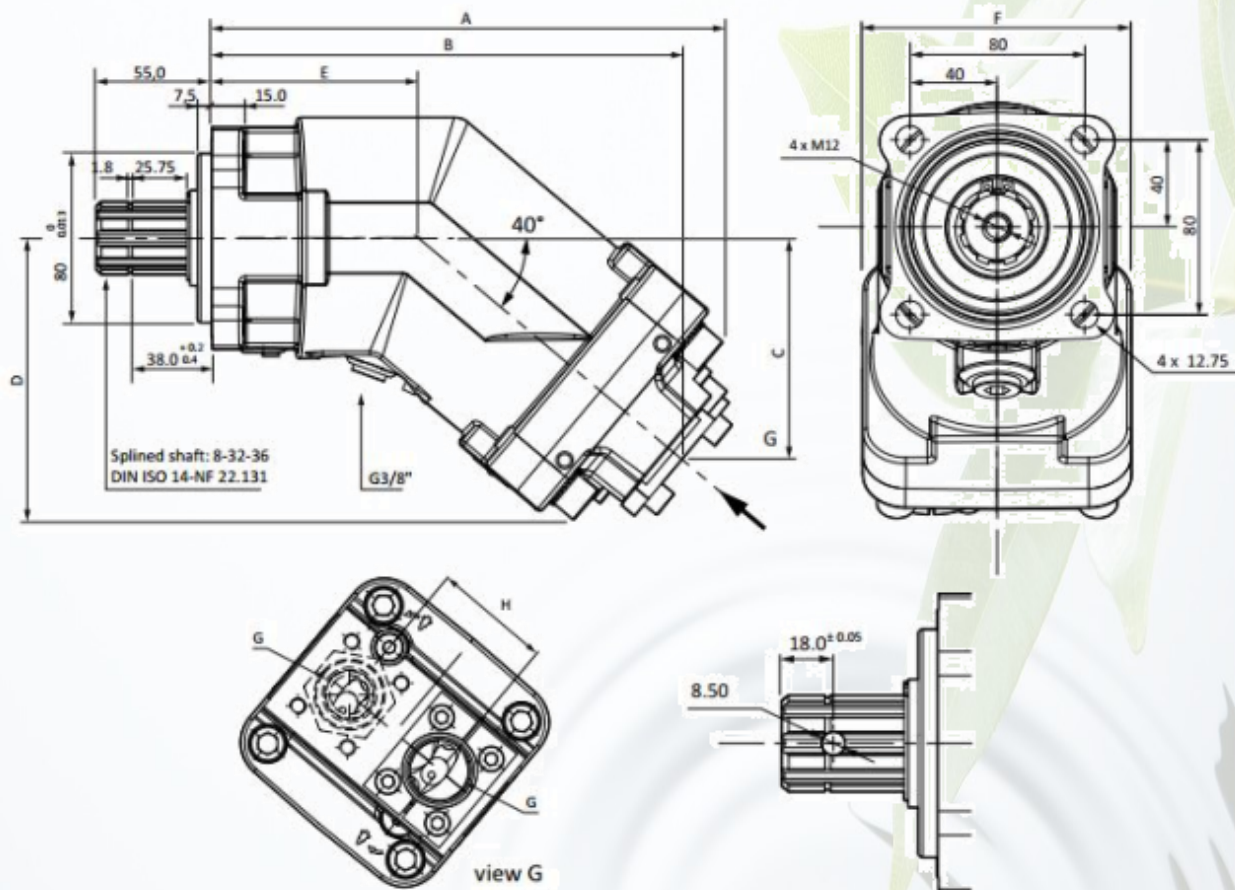

Pump type	Displacement (cc)	Max. Continuous Pressure (bar)	Min Intermittet P. Pressure (bar)	Max. Rotation Speed (rpm)	Max. Torque (Nm)	Max. Intermittent pressure (bar)	Weight without inlet fitting (kg)	Weight with inlet fitting (kg)	Torque without inlet fitting (kg)	Torque with inlet fitting (kg)
45	42.2	350	400	2400	240	-	10.5	10.9	11.12	11.4

Pump type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Fluid	Rotation
45	202	182	82	108	86	108	3/4"	54	Miral based hydraulic oils	CW-CCW

TAON


Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.

• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.

HDS 55 cc




Pump type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Fluid	Rotation
55	215	196	94	118	86	108	3/4"	54	Miral basedhydraulic oils	CW-CCW

Piston pump—Bent Axis

Fixed-displacement piston pump—Bent-Axis piston pump

HDS 63 cc

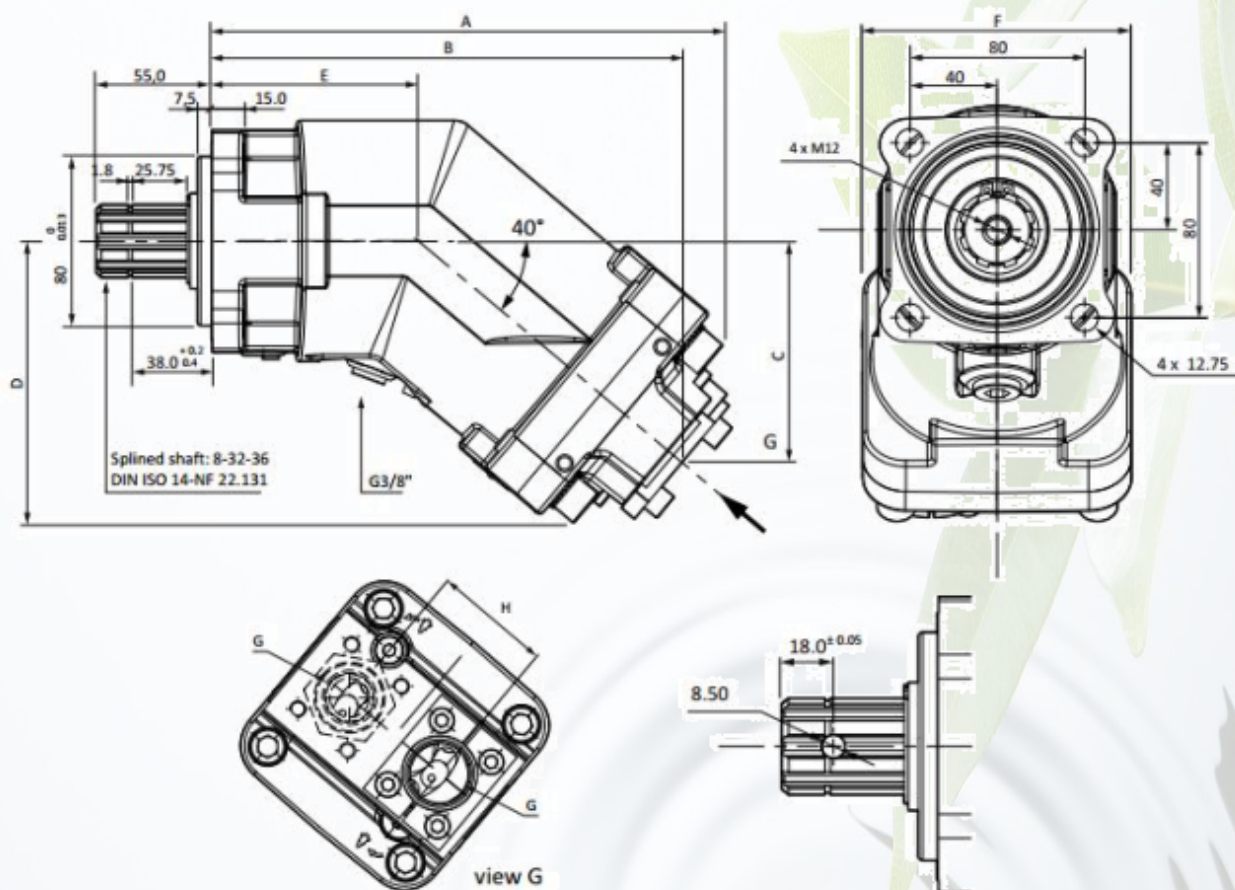

Pump type	Displacement (cc)	Max. Continuous Pressure (bar)	Min Intermittet P. Pressure (bar)	Max. Rotation Speed (rpm)	Max. Torque (Nm)	Max. Intermittent pressure (bar)	Weight without inlet fitting (kg)	Weight with inlet fitting (kg)	Torque without inlet fitting (kg)	Torque with inlet fitting (kg)
63	67.4	350	400	2200	360	-	11.5	11.9	11.77	12.23

Pump type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Fluid	Rotation
63	215	196	94	118	86	108	3/4"	54	Miral based hydraulic oils	CW-CCW

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.


• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.

Piston pump—Bent Axis

Fixed-displacement piston pump—Bent-Axis piston pump

HDS 85 cc

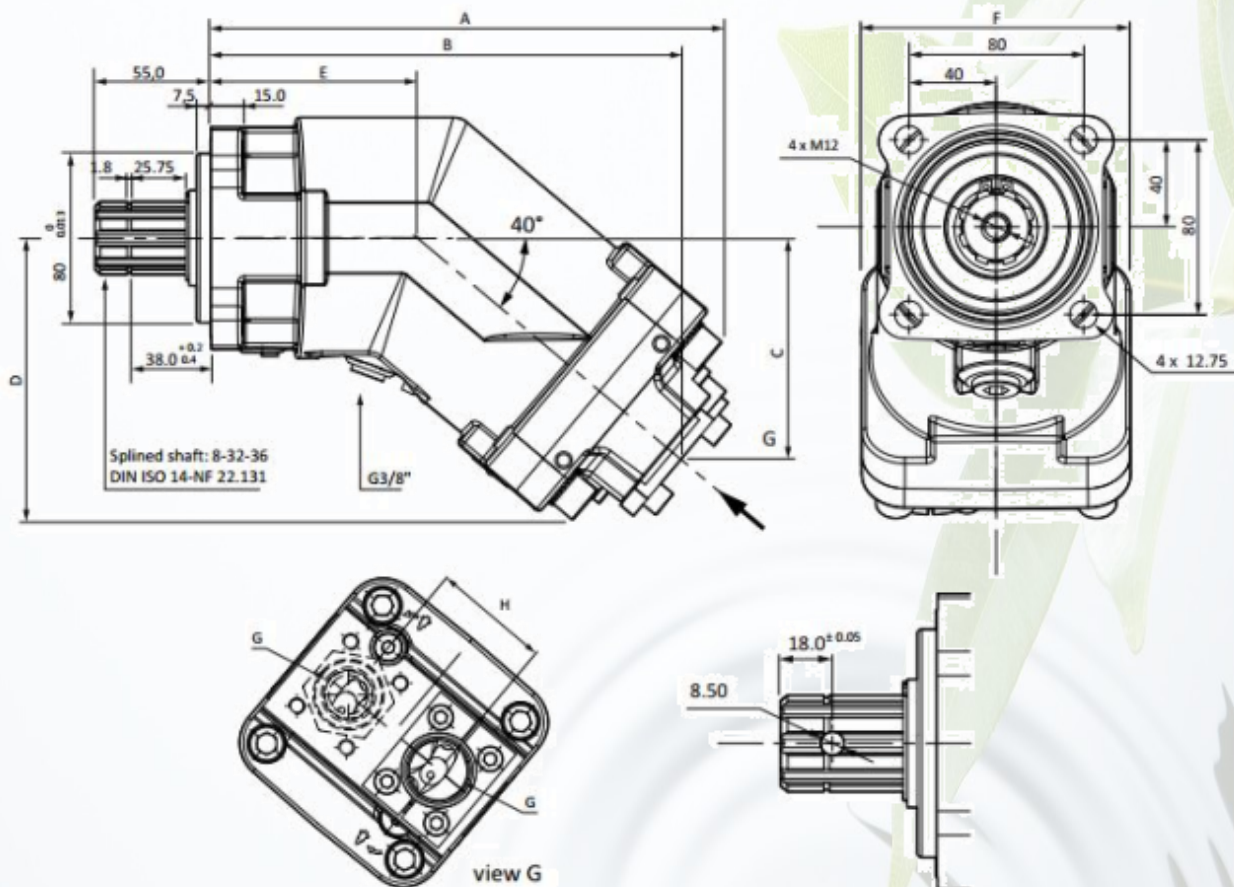

Pump type	Displacement (cc)	Max. Continuous Pressure (bar)	Min Intermittet P. Pressure (bar)	Max. Rotation Speed (rpm)	Max. Torque (Nm)	Max. Intermittent pressure (bar)	Weight without inlet fitting (kg)	Weight with inlet fitting (kg)	Torque without inlet fitting (kg)	Torque with inlet fitting (kg)
85	85.2	350	400	2250	460	-	15	15.4	17.8	18.33

Pump type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Fluid	Rotation
85	223	223	105	132	98	122	1"	60	Miral based hydraulic oils	CW-CCW

TAON


Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.

• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.

HDS 108 cc



Pump type	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Fluid	Rotation
108	223	223	105	132	98	122	1"	60	Miral basedhydraulic oils	CW-CCW